

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 May 2002 (30.05.2002)

PCT

(10) International Publication Number  
**WO 02/43105 A1**

(51) International Patent Classification<sup>7</sup>: **H01J 49/42**

Alexander, William [GB/GB]; 52 Ainsbury Road, Coventry CV5 6BB (GB). GIANNAKOPOULOS, Anastassios [GB/GB]; 16 Burnsall Road, Coventry CV5 6BP (GB).

(21) International Application Number: **PCT/GB01/05174**

(22) International Filing Date:  
23 November 2001 (23.11.2001)

(74) Agents: **DEMPSTER, Benjamin, John, Naftel et al.**; Withers & Rogers, Goldings House, 2 Hays Lane, London SE1 2HW (GB).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0028586.6 23 November 2000 (23.11.2000) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **UNIVERSITY OF WARWICK** [GB/GB]; Gibbet Hill Road, Coventry CV4 7AL (GB).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DERRICK, Peter, John** [GB/GB]; Attwood Cottage, Ladbroke, Leamington Spa, Warwickshire CV33 0BV (GB). **COLBURN,**

[Continued on next page]

(54) Title: **AN ION FOCUSSED AND CONVEYING DEVICE AND A METHOD OF FOCUSSED AND CONVEYING IONS**

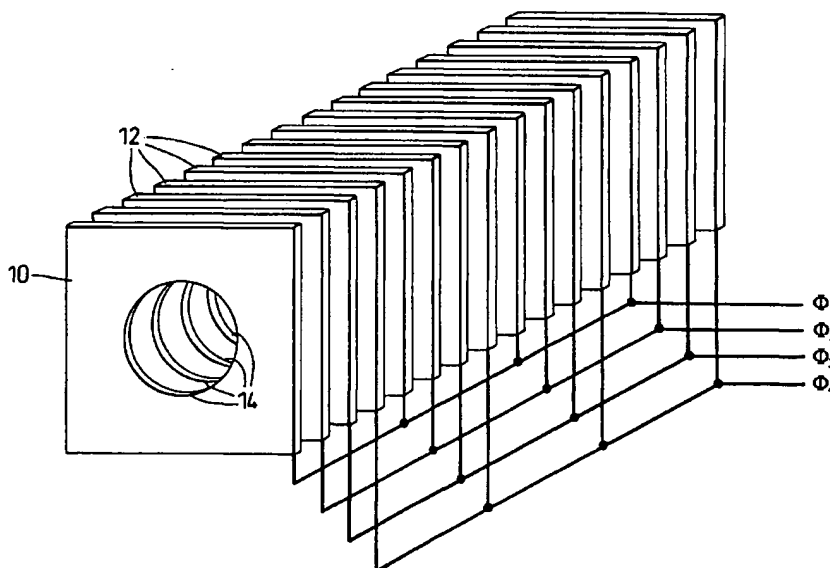

(57) Abstract: An ion focussing and conveying device (10) comprises a plurality of electrodes (12) in series. Means is provided to apply a first alternating voltage waveform to each electrode (12), the phase of the alternating voltage in the first waveform is applied to each electrode (12) in the series being ahead of the phase of the first alternating voltage waveform applied to the preceding electrode (12) in the series by less than 180°, preferably by 90° or less, such that ions are focussed onto an axis of travel and impelled along the series of electrodes (12).

WO 02/43105 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**An Ion Focussing And Conveying Device  
And A Method Of Focussing And Conveying Ions**

The invention relates to an ion focussing and conveying device and to a method of  
5 focussing and conveying ions.

Mass spectrometers include a source of ions. One technique to obtain ions is  
electrospray ionisation (ESI) which is an ionisation method which operates at  
atmospheric pressure. A solution of analyte molecules is sprayed from the tip of a  
10 needle held at high potential producing an aerosol of charged droplets. Bulk transfer  
properties carry the droplets towards and through an aperture (sometimes a capillary  
tube) into a low pressure region of the ion source where the pressure is usually between  
0.1mbar and 10mbar. A second aperture (sometimes a conical skimmer) allows a  
portion of the expanding jet from the first aperture to pass into a lower pressure region  
15 and eventually into the mass analyser. The apertures form conductance restrictions  
between each vacuum stage necessary for the differential pumping system to operate  
efficiently. During the passage from atmospheric pressure to the low pressure region  
within a mass analyser, evaporation of the solvent in the droplet occurs and finally  
molecule ions are produced.

20 Current ESI source designs exhibit poor transmission efficiency due to the considerable  
loss of charged entities to parts surrounding the various apertures. Experimental  
measurements have shown that with some sources less than 1 part in  $10^3$  of the  
available current passes through the first aperture and less than 1 part in  $10^2$  of that  
passes through the second aperture. Overall, less than 1 part in  $10^5$  of the electrospray  
25 needle current is typically available as ion current into the mass spectrometer. In order  
to improve transmission efficiency, a mechanism of focusing the charged entities into  
the apertures is required. Conventional electrostatic optics techniques, which would be  
used in high vacuum, do not work in these higher pressure regions due to the large  
number of collisions with surrounding gas molecules. Electrostatic optics techniques

generally require the energy of transmitted entities to be conserved during their passage through the optical system.

According to one aspect of the invention there is provided an ion focussing and conveying device comprising a plurality of electrodes in series, and means to apply at  
5 least one alternating voltage waveform to each electrode, the phase of the alternating voltage in the or a first waveform applied to each electrode in the series being ahead of the phase of the or the first alternating voltage applied to the preceding electrode in the series by less than  $180^\circ$  such that ions are focussed onto an axis of travel and impelled along the series of electrodes.

10 The trapping and focusing action of this device comes from a development of the "Paul effect". The Paul effect itself is shown where apertured electrodes are arranged in series. An alternating radio-frequency (RF) voltage is applied to alternate electrodes of the series and an alternating voltage in anti-phase to the first is applied to the other electrodes in the series so as to produce an alternating field with a field-free region at its  
15 centre between the electrodes. This effect produces focusing of charged entities trapping them in a field-free region along a central axis. In the invention, the voltages applied to adjacent electrodes in the series are systematically deviated from the anti-phase condition to result in a field which pulls the ions through the device.

The principle of operation of the device is thus to produce an alternating electric field or  
20 combinations of fields, which have the properties of focusing, collimating, trapping and transmitting charged entities entering the device and reducing the kinetic energies of the entities to a common low value. The entities may have a large spread of mass, energy and position on entering the device. The mechanism of operation is the application of multiple-voltage waveforms to a repetitive series of electrodes where the relative phases  
25 and shapes of the waveforms are tailored to produce the desired alternating electric field.

In the case of an ESI source of a mass spectrometer, this means that rather than obtaining less than 1 part in  $10^5$  of the electrospray needle current as ion current into the

mass analyser, a much higher proportion of the ions produced can be supplied into the mass analyser, due to the focussing, collimation and transmission of the ions.

The phase-difference between adjacent electrodes may each be set at any suitable level, and preferably there is a common phase-difference between all adjacent electrodes. The  
5 common phase-difference is preferably  $360^\circ/n$  where  $n$  is a natural number greater than two, and preferably greater than three, as this leads to a smoother transmission of the ions. The means to apply alternating voltages to the electrodes may apply voltages in any suitable waveform and in one preferred embodiment the means to apply alternating voltages applies alternating voltages with a sinusoidal waveform to the electrodes.  
10 Triangular (i.e. saw tooth) and square waveforms can also be used.

The frequency of the or the first applied alternating voltage may be at any suitable desired level, but preferably is less than 100 kHz.

The frequency of the or the first applied alternating voltage may be altered in use and preferably is swept, for example, over a range of at least 100 kHz. This flattens the  
15 transmission efficiency curve and avoids high mass stagnation.

In one embodiment, the alternating voltages applied may include a further superimposed component consisting of anti-phase voltages applied to alternate electrodes. Thus, the means to apply alternating voltages may also be arranged to apply a second alternating voltage waveform to each electrode simultaneously with the first  
20 such that anti-phase alternating voltages are applied to alternate electrodes. A composite waveform is thus applied. The anti-phase voltages generate a series of static Paul traps along the axis of the device. The applied composite waveform thus promotes transmission between Paul traps in the direction of wave propagation. The application of the anti-phase voltages assists in very low pressure regions, as the radial focussing  
25 effect is enhanced. The difficulty in such low-pressure regions is that an ion travelling in a direction away from and out of the electric field produced by the electrodes may not collide with another particle until it is too far from the field for the focussing of the field to be effective. Thus fewer particles are actually focussed, unless the focussing

effect of the field is enhanced as described. The second alternating voltage waveform may be 1 to 4 MHz in frequency.

The distance between the electrodes may be any suitable distance and preferably there is the same distance between each of the adjacent electrodes. The electrodes may be of  
5 any desired shape and may all be identical. Preferably each electrode defines a central aperture, which may be of any desired shape and in one preferred embodiment is circular, and in another preferred embodiment is a slit.

In one embodiment the electrodes or the field applied thereby is conveniently arranged to focus the ions to and to impel them along a straight path through the device. In  
10 another embodiment, however, the electrodes or field is arranged to focus the ions to and to impel them along a curved path. In use, when ions are admitted to the device, neutral entities such as gas molecules, droplets of liquid and other matter will also enter the device and these will affect the pressure within the device and hence the frequency of collision of the ions and the effectiveness of focussing and impelling of the ions.  
15 More seriously, however, where the device feeds a mass analyser, the neutral matter can pass through the device and interfere with analysis by the analyser. By arranging the electrodes or field to focus the ions to and to impel them along a curved path, the ions will take a different path from the uncharged entities and so the effect of the presence of the admitted neutral entities can be minimised. A non-straight path may also be  
20 desirable for spatial arrangement or other reasons. The path may curve in only one direction or may be S-shaped or may curve in more directions. The curved path may have a constant radius or the radius may vary, as desired. Preferably the electrodes are arranged in the curved path. The electrodes may be planar and may lie on planes which are substantially radial to the curve.

25 According to another aspect of the invention there is provided a method wherein a method of focussing and conveying ions comprising applying at least one alternating voltage waveform to each of a plurality of electrodes in series, the phase of the or a first alternating voltage applied to each electrode in the series being ahead of the phase of the or the first alternating voltage applied to the preceding electrode in the series by less

than  $180^\circ$  such that the ions are focussed on to an axis of travel and advanced along the series of electrodes.

The phase-difference between the electrodes may be set at any suitable level, and preferably there is the same phase-difference between each of the adjacent electrodes.

- 5 The phase-difference is preferably  $360^\circ/n$  where  $n$  is a natural number greater than two, and preferably greater than three, as this leads to a smoother transmission of the ions. The waveform of the applied alternating voltage may be of any suitable shape and may be sinusoidal, triangular or square. The alternating voltages applied may include a further superimposed component consisting of anti-phase voltages applied to alternate  
10 electrodes.

The voltages may be applied to the electrodes and/or the electrodes may be arranged such that ions are focussed and advanced along a straight, or a curved path.

Embodiments of the invention will now be described by way of example and with reference to the accompanying drawings, in which:

- 15 Fig 1 is a perspective view of the device of the first embodiment of the invention;
- Fig 2 is four graphs of voltage waveforms having the same time axis, the waveforms representing the phases of the alternating voltages applied to each set of four electrodes in the series shown in Fig 1;
- Fig 3 is a temporal series of graphs of voltage against electrode location in the device of  
20 Fig 1;
- Fig 4a is a plan view of computer modelled ion movement paths in the device of the first embodiment under a first applied voltage condition;
- Fig 4b is a detail perspective view of the paths shown in Fig 4a;
- Fig 5 is a plan view of computer modelled ion movement paths in the device of the first  
25 embodiment under lower pressure than in Figs 4a and 4b;

Fig 6a is a plan view of computer modelled ion movement paths in the device of the first embodiment under a second applied voltage condition and the same pressure as in Fig 5;

Fig 6b is a detail perspective view of the paths shown in Fig 6a; and,

5 Fig 7 is a perspective view of the device of the second embodiment of the invention.

The device 10 of the embodiment of the invention comprises, as shown in Figure 1, a series of square electrode plates 12, each with a circular central aperture 14. The plates 12 are arranged in parallel planes with the centres of the circular apertures 14 aligned along an axis. The cross-section of both the electrode plates 12 and the apertures 14  
10 may take other shapes such as, elliptical, rectangular or indeed any regular or irregular polygon or curve, such shapes being used to define the symmetric or asymmetric performance of the device. The apertures 14 are about 20 mm in diameter and the spacing between adjacent electrode plates 12 is about 10 mm. As shown, every fourth electrode plate 12 is connected to a common alternating voltage source  $\Phi 1$  to  $\Phi 4$ , the  
15 sources differing in phase.

Figure 2 shows an example of a series of suitable voltage waveforms for the sources  $\Phi 1$  to  $\Phi 4$ , namely, four sinusoids phase shifted  $90^\circ$  with respect to each other. Such suitable waveforms are hereafter collectively called "conveyor" waveforms. The conveyor waveforms are applied to the electrodes 12 sequentially and repetitively  
20 according to the number of phases employed. Figure 3 shows a series of temporal snapshots of the voltages applied to the series of electrodes 12. The effect of the conveyor waveforms is to produce a travelling wave as a function of time, which is reflected in the electric field produced within the electrode structure. Reversal in order of the conveyor waveforms causes the wave to propagate in the opposite direction. This  
25 four-phase sinusoid configuration is the lowest order solution which provides a smooth propagation wave. Equation I shows the relationship between the propagation velocity of the wave ( $v$ ), electrode spacing ( $l$ ) and frequency of applied conveyor waveforms ( $f$ ).



$$v=4lf \quad (I)$$

The action of this travelling wave is to push any charged entity within the electric field in the direction of propagation of the wave, providing motive force for transmission through the device 10. The trapping and focusing action of this device comes from the "Paul" effect in which two anti-phase radio-frequency (RF) voltages are applied to alternate electrodes in the structure to produce an alternating field with a field-free region at its centre. This effect produces radial focusing of the charged entities at the centre of the electrodes trapping them in a series of field-free regions along the central axis of the device. The conveyor waveforms utilised here form two pairs of anti-phase voltages producing a series of inter-linked Paul traps which propagate axially along the device.

Figure 4a and 4b show a Simion 6 ion trajectory simulation for the device 10 utilising the illustrated conveyor waveforms, where Fig 4a is a 2-dimensional plot of ion trajectories and 4b is a close-up 3-dimensional plot of the focusing region. A voltage of 3kV was applied at an alternating frequency of 500 kHz. Ten trajectories for an ion of mass 1000amu with energy 200eV are plotted from a series of positions across the aperture of the device with a short mean free path set to simulate medium to high pressure regions. Prompt radial focusing occurs as the ions describe orbits in the alternating electric field with the orbital motion collapsing into an oscillatory motion along the central axis of the device 10. As the ions reach the central axis the propagation wave dominates their motion pushing them through the device 10.

Figure 5 shows a Simion 6 ion trajectory simulation where the mean free path has been increased by an order of magnitude to simulate low pressure regions. At low pressures where the mean free path is large and energy loss due to collisions is small the efficiency of radial focusing and trapping decreases. This is because the velocity of the charged entity carries it away from the influence of a given electrode 12 before it has experienced the influence of a full cycle of the alternating electric field, necessary for effective trapping. Increasing the frequency of the conveyor waveforms to increase trapping efficiency results in a proportionate increase in wave propagation velocity

leading to increased velocity of the charged entities. The net result is little improvement in trapping efficiency and increased energy spread.

It is possible to modify the conveyor waveforms applied to the electrodes 12 to restore  
5 good performance in low pressure regions. By applying anti-phase RF voltages at, say,  
2MHz, to alternate electrodes 12 a series of static Paul traps is generated along the axis  
of the device. The conveyor waveforms can be superimposed on the RF voltages to  
produce four "composite" waveforms. The superimposed conveyor waveform  
promotes transmission between Paul traps in the direction of wave propagation.  
10 Figures 6a and 6b show Simion 6 ion trajectory simulations for the device 10 utilising  
the composite waveforms, where Fig 6a is a 2-dimensional plot of ion trajectories and  
Fig 6b is a close-up 3-dimensional plot of the focusing region. The simulation  
parameters are the same as for Figure 5 (i.e. the same low pressure) except for the  
application of composite waveforms.  
15 Both variations, namely the conveyor and composite waveforms, show good radial  
focusing properties. Transmission efficiency is good over a large mass range but is  
related to the conveyor frequency, higher masses take longer to propagate through the  
device 10 for a given conveyor frequency. For very large mass ranges the conveyor  
frequency may be swept in order to flatten the transmission efficiency curve and avoid  
20 high mass stagnation.

The device or multiple devices can thus be interposed between an electrospray needle  
and a mass analyser, for example, in place of the first and second apertures described  
(which can be defined by a capillary tube and a conical skimmer) and will allow a very  
high proportion of the ions produced to be focussed for use rather than lost as in the  
25 known technique described.

The device is in no way limited to use with ESI sources and could be used with MALDI  
(Matrix Assisted Laser Desorption/Ionisation) sources, atmospheric MALDI sources,  
chemical ionisation sources or any other suitable ion source.

The device can be used with any suitable kind of mass spectrometer such as a Fourier  
30 Transform Ion Cyclotron Resonance (FTICR) spectrometer, quadrupole spectrometer,  
ion trap spectrometer or orthogonal time-of-flight spectrometer, for example. The

device can be used for RF ion traps in which pressure within the mass analyser is high due to the presence of buffer gas.

Combinations of the device utilising both conveyor and composite waveforms may be used to control the transmission of charged entities from high pressure regions through  
5 to low pressure regions and if required back to high pressure regions and to control their kinetic energies. Use of this device as a collision cell or modification of a multipole by division of the multipole into discrete electrodes and application of the conveyor waveforms to assist transmission are examples of application.

The two basic elements, being the conveyor and the Paul trap waveforms, represent  
10 extremes, between which lie a continuous range of different operating devices.

The device 10 of the second embodiment as shown in Fig 7 is similar to that of the first and only the differences from the first embodiment will be described. The same reference numerals will be used for equivalent features.

In the second embodiment, the electrodes 12 are the same as in the first embodiment  
15 but instead of being arranged with the centres of the apertures 14 in a straight line, they are arranged in a smooth curve of constant radius. The radius at the centre line or so-called "optical axis" is 60 mm. The electrode plates 12 are arranged at 10° intervals and eight are shown, so that the ion path is curved through 80°. There are two charged sheets 16 at each end of the device 10 and there is no curvature of the path between the  
20 sheets 16 at each end. As mentioned, the ion path within the device 10 is kept at a controlled low pressure. When ions are admitted to the device 10 gas or other molecules are drawn in by the vacuum together with other neutral entities. In the case where the device 10 is used with an ESI source, droplets of solvent may enter the device 10. These uncharged entities will not be affected by the applied electric field in  
25 the same way as the ions and so will tend to continue to travel through the device 10 in a straight path. In the device 10 of the first embodiment, this will take them along the ion path, which is undesirable, in particular where the device 10 feeds into a mass analyser into which the uncharged entities may pass with the focussed ions. In the device 10 of the second embodiment, the ion path is curved and so the ions are diverted  
30 away from the likely path of the uncharged entities and so interference with the desired pressure is minimised. It is seen that focussing does not take place as quickly as in the device 10 of the first embodiment but this can be compensated for by adding more electrode plates 12 or by adding electrodes 12 on a straight path at the end of the curve.

Two effects are seen. One is that the ions are curved away from a straight path by the electric field from the electrodes 12. The other is that the electrodes themselves deflect the neutral entities away from the path taken by the ions. The straight path, as shown at 18, taken by the neutral entities will hit an electrode 12 along the ion path which is at an angle to the straight path such that it will deflect the incident entities

5

## Claims

1. An ion focussing and conveying device comprising a plurality of electrodes in series, and means to apply at least one alternating voltage waveform to each electrode,  
5 the phase of the alternating voltage in the or a first waveform applied to each electrode in the series being ahead of the phase of the or the first alternating voltage waveform applied to the preceding electrode in the series by less than  $180^\circ$  such that ions are focussed onto an axis of travel and impelled along the series of electrodes.
- 10 2. A device as claimed in claim 1, wherein there is a common phase-difference between all adjacent electrodes.
3. A device as claimed in claim 2, wherein the common phase-difference is  $360^\circ/n$ , where  $n$  is a natural number greater than two.
- 15 4. A device as claimed in claim 2, wherein the common phase-difference is  $360^\circ/n$ , where  $n$  is a natural number greater than three.
5. A device as claimed in any preceding claim, wherein the means to apply at  
20 least one alternating voltage applies an alternating voltage with a sinusoidal waveform to each electrode.
6. A device as claimed in any preceding claim, wherein the means to apply at  
25 least one alternating voltage applies an alternating voltage with a triangular waveform to each electrode.
7. A device as claimed in any preceding claim, wherein the means to apply at  
30 least one alternating voltage applies an alternating voltage with a square waveform to each electrode.
8. A device as claimed in any preceding claim, wherein the frequency of the or the first applied alternating voltage is less than 100 kHz.

9. A device as claimed in any preceding claim, wherein the frequency of the or the first applied alternating voltage is altered in use.
10. A device as claimed in claim 9, wherein the frequency of the or the first applied alternating voltage is swept.
11. A device as claimed in claim 10, wherein the frequency of the or the first alternating voltage is swept over a range of at least 100 kHz.
12. A device as claimed in any preceding claim, wherein means is provided to apply a second alternating voltage waveform to each electrode simultaneously with the first such that anti-phase alternating voltages are applied to alternate electrodes.
13. A device as claimed in claim 12, wherein the second alternating voltage waveform is between 1 and 4 MHz in frequency.
14. A device as claimed in any preceding claim, wherein there is the same distance between each of the adjacent electrodes.
15. A device as claimed in any preceding claim, wherein the electrodes are all identical.
16. A device as claimed in any preceding claim, wherein each electrode defines a central aperture.
17. A device as claimed in claim 16, wherein the aperture is circular.
18. A device as claimed in claim 16, wherein the aperture is a slit.
19. A device as claimed in any preceding claim, wherein the plurality of electrodes or field is arranged to focus the ions to and impel them along a curved path.
20. A device as claimed in claim 19, wherein the path curves in only one direction.

21. A device as claimed in claim 20, wherein the curved path has a constant radius.
22. A device as claimed in claim 19, 20, or 21, wherein the electrodes are arranged  
5 in the curved path.
23. A device as claimed in any of claims 19 to 22, wherein the electrodes are planar and lie on planes which are substantially radial to the curve.
- 10 24. An ion focussing and conveying device substantially as described herein with reference to the accompanying drawings.
25. Apparatus consisting of an ion source supplying ions directly into a device according to any preceding claim, which in turn supplies ions directly into a mass  
15 analyser.
26. Apparatus as claimed in claim 25, wherein the ion source is an electrospray ionisation needle.
- 20 27. A method of focussing and conveying ions comprising applying at least one alternating voltage waveform to each of a plurality of electrodes in series, the phase of the or a first alternating voltage applied to each electrode in the series being ahead of the phase of the or the first alternating voltage applied to the preceding electrode in the series by less than  $180^\circ$  such that the ions are focussed on to an axis of travel and  
25 advanced along the series of electrodes.
28. A method as claimed in claim 27, wherein there is the same phase-difference between all adjacent electrodes.
- 30 29. A method as claimed in claim 28, wherein the phase-difference is  $360^\circ/n$ , where n is a natural number greater than two.

30. A method as claimed in claim 28, wherein the phase-difference is  $360^\circ/n$ , where n is a natural number greater than three.
31. A method as claimed in any of claims 27 to 30, wherein the waveform of the or the first applied alternating voltage is sinusoidal.
32. A method as claimed in any of claims 27 to 30, wherein the waveform of the or the first applied alternating voltage is triangular.
33. A method as claimed in any of claims 27 to 30, wherein the waveform of the or the first applied alternating voltage is square.
34. A method as claimed in any of claims 27 to 31, wherein the frequency of the or the first applied voltage is less than 100 kHz.
35. A method as claimed in any of claims 27 to 34, wherein the frequency of the or the first applied voltage is altered.
36. A method as claimed in claim 35, wherein the frequency of the or the first applied voltage is swept.
37. A method as claimed in claim 36, wherein the frequency of the or the first applied voltage is swept over a range of at least 100 kHz.
38. A method as claimed in any of claims 27 to 39, wherein a second alternating voltage waveform is applied to each electrode simultaneously with the first such that anti-phase alternating voltages are applied to alternate electrodes.
39. A method as claimed in claim 38, wherein the second alternating voltage waveform is between 1 and 4 MHz in frequency.



15

40. A method as claimed in any of claims 27 to 39, wherein the voltages are applied to the electrodes and/or the electrodes are arranged such that ions are focussed and advanced along a curved path.

5 41. A method as claimed in claim 40, wherein the path curves in only one direction.

42. A method as claimed in claim 41, wherein the curved path has a constant radius.

10


43. A method substantially as described herein with reference to the accompanying drawings.

15

20


25


1/8

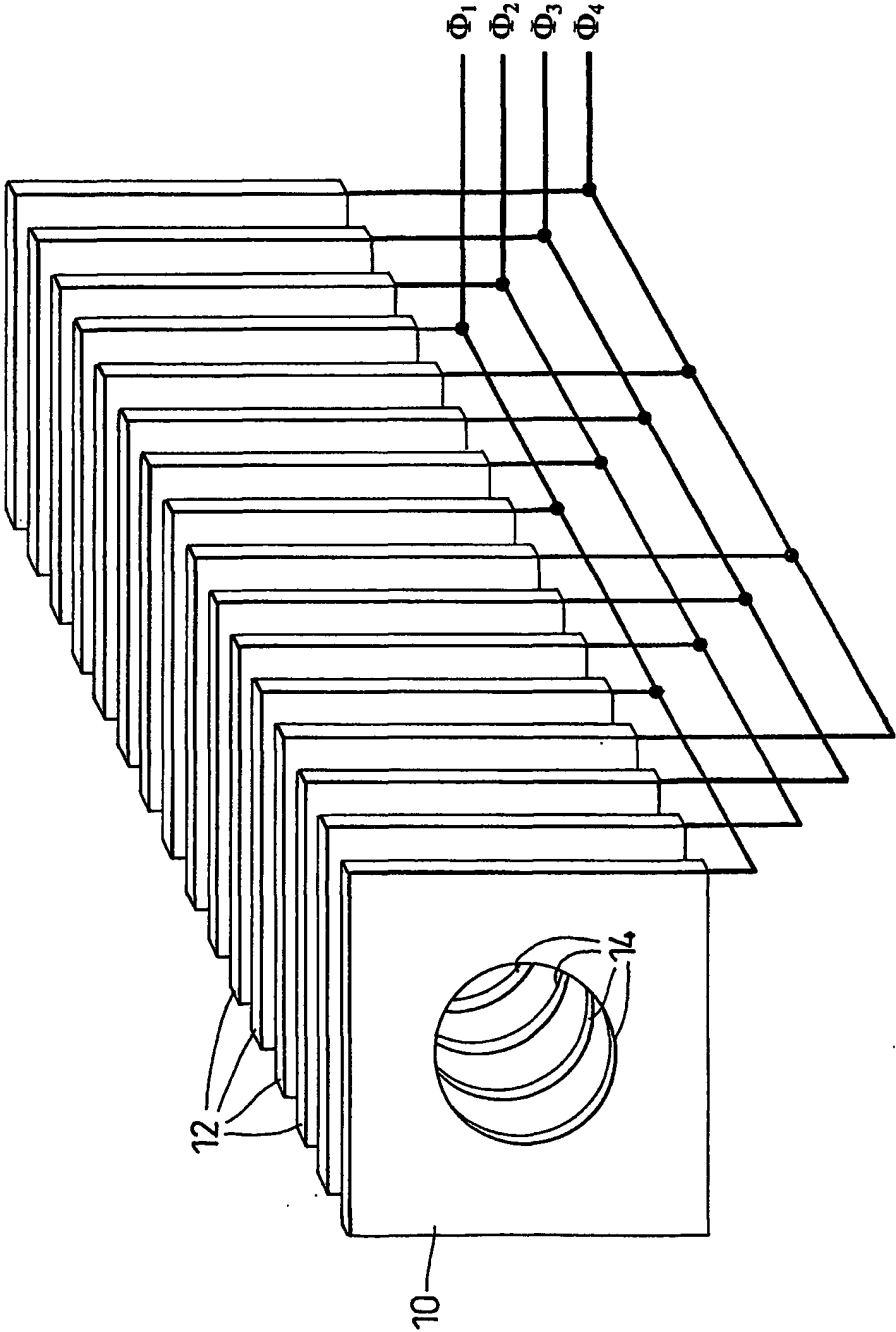


*Fig. 1*


2/8


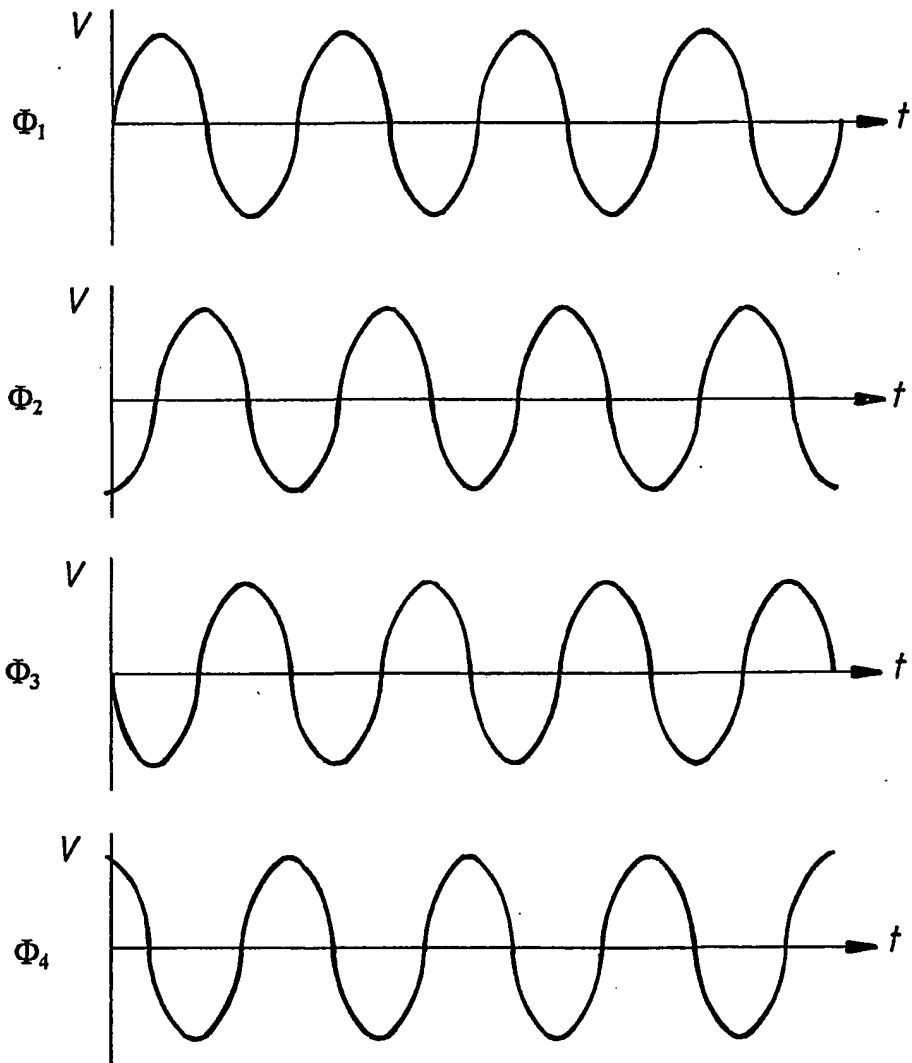
***Fig. 2***

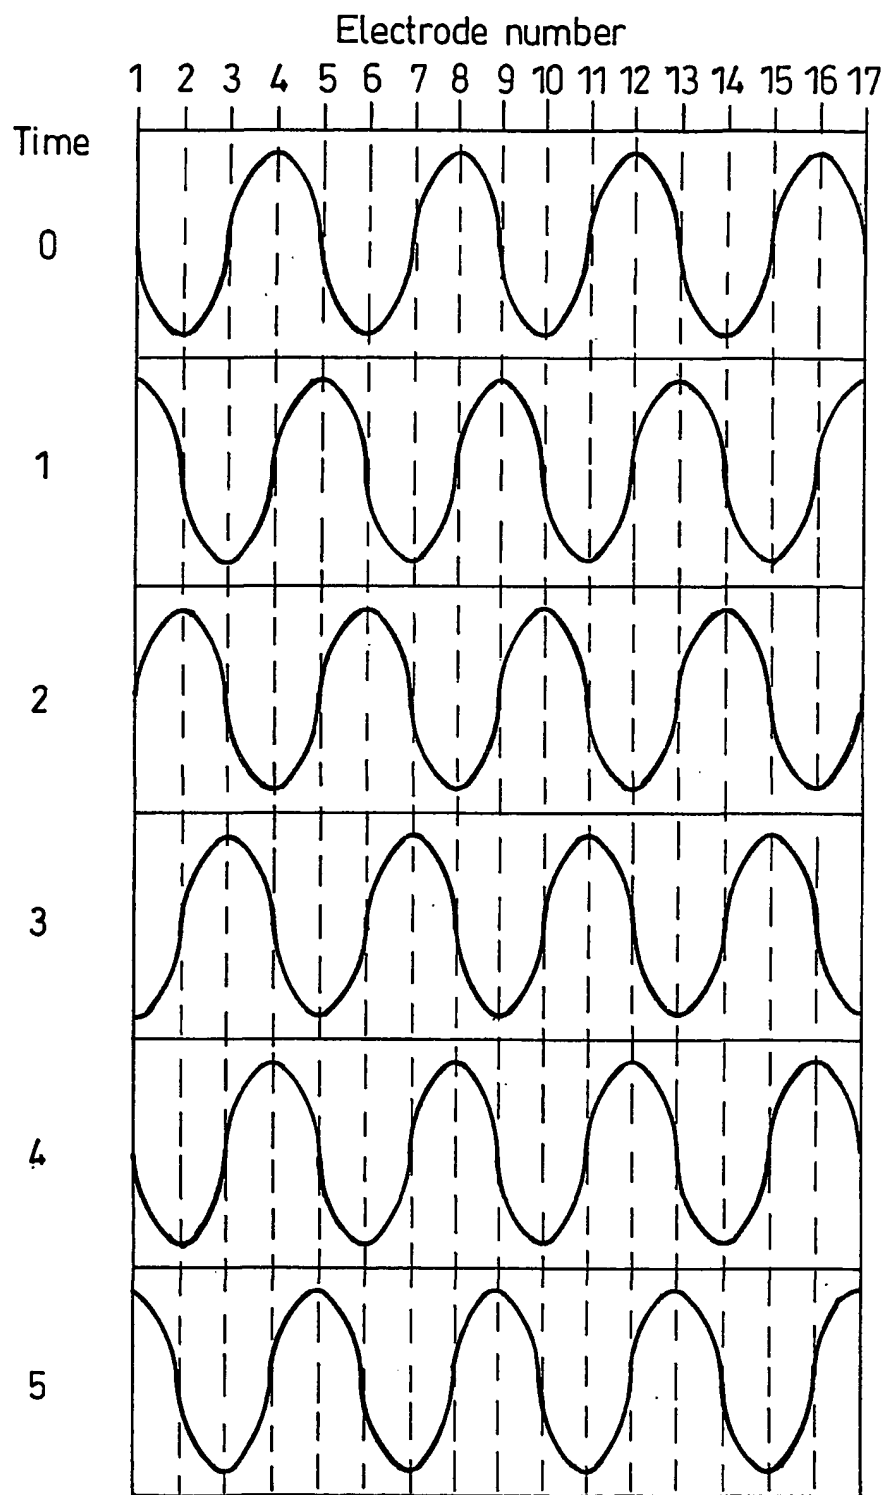
**3/8*****Fig. 3***

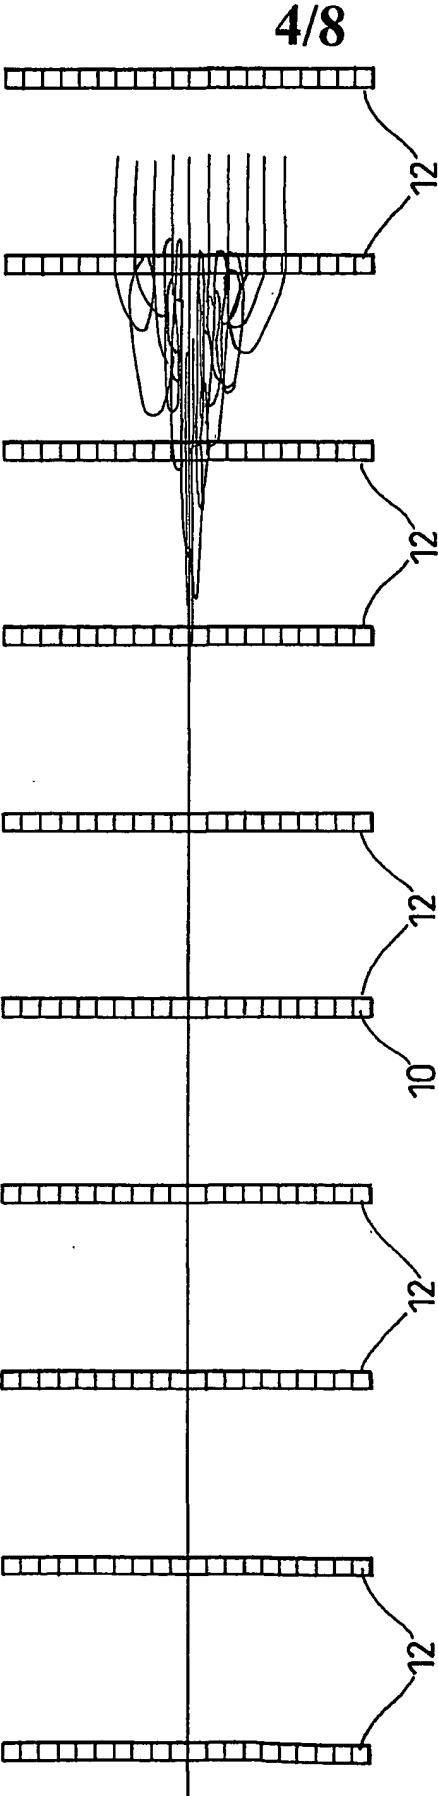

*Fig. 4a*

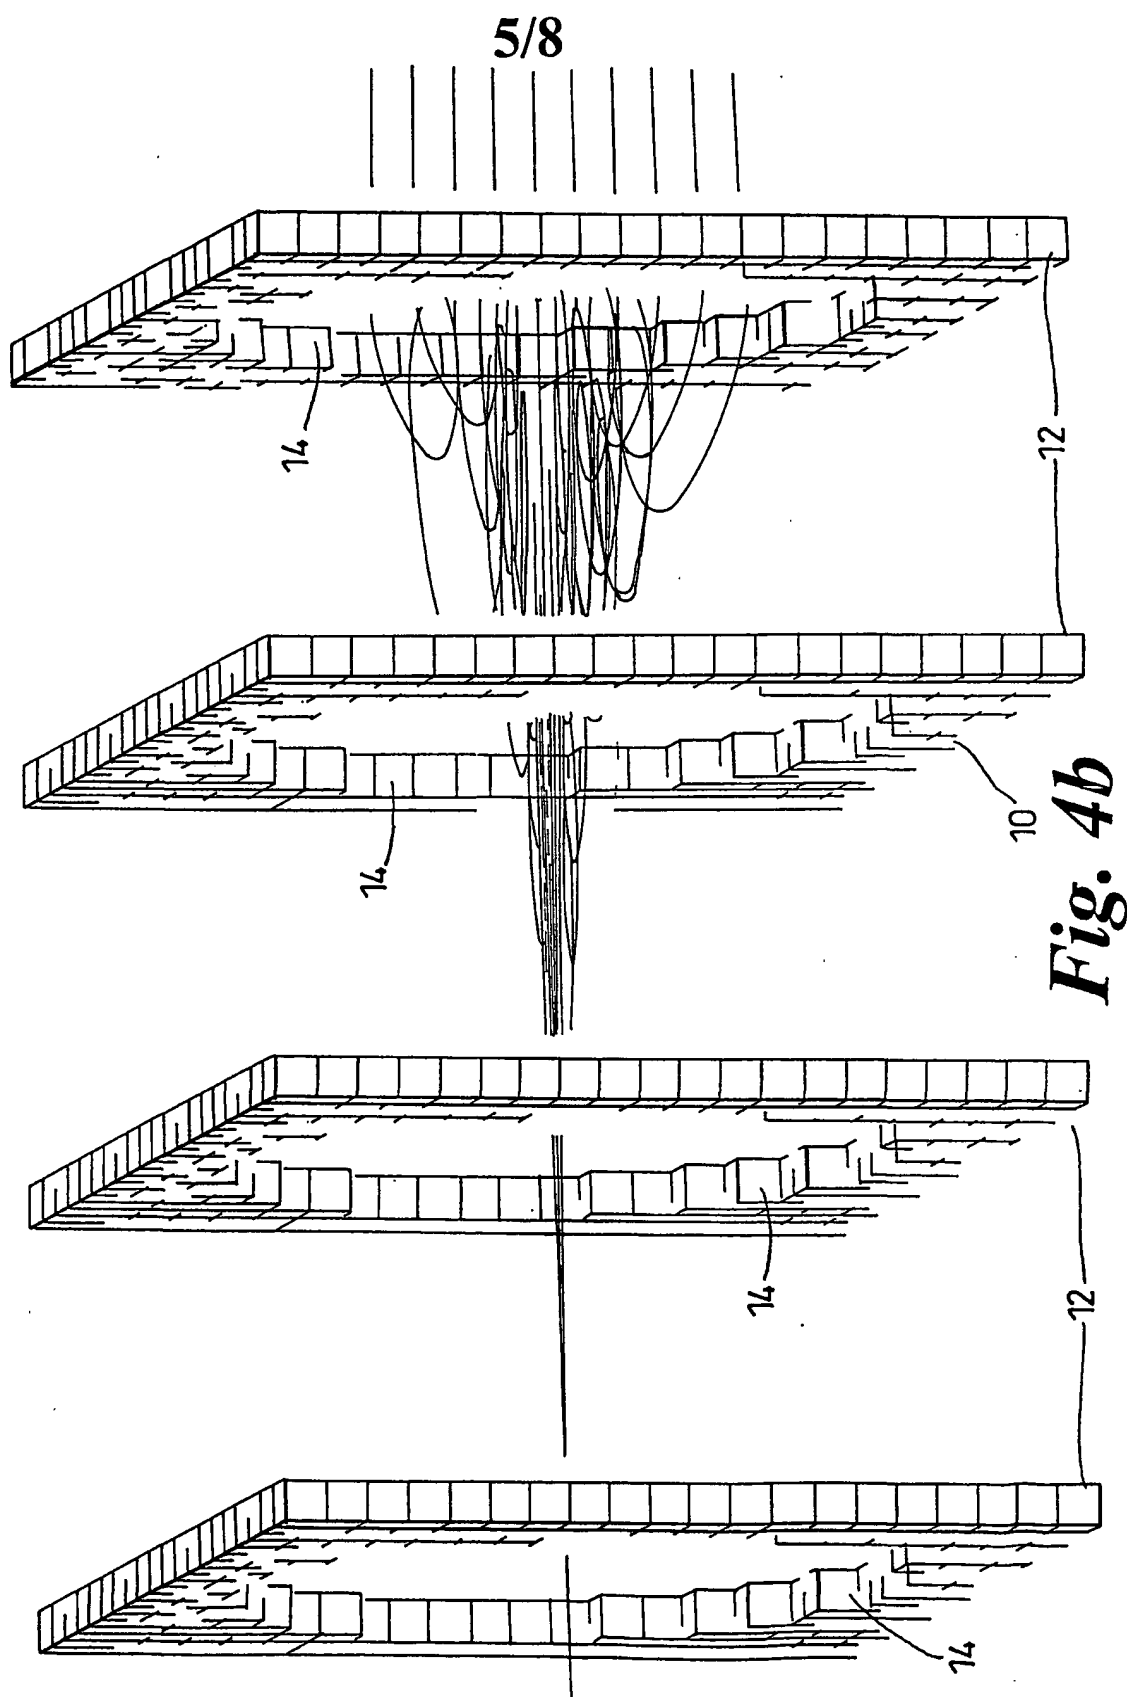

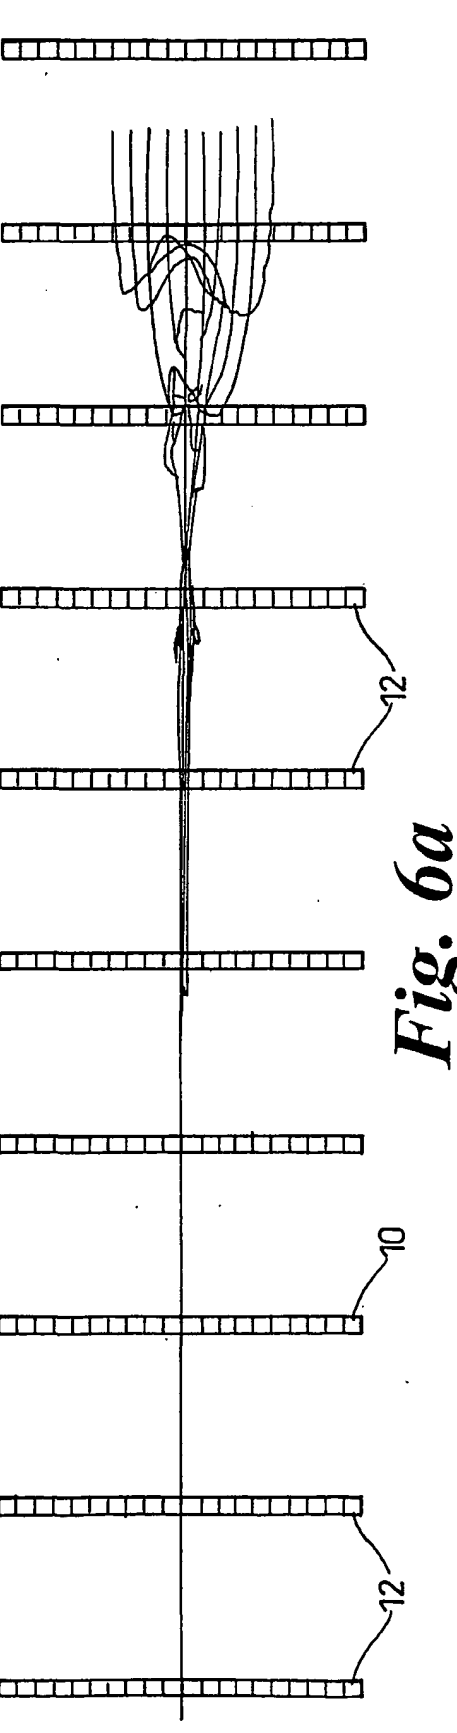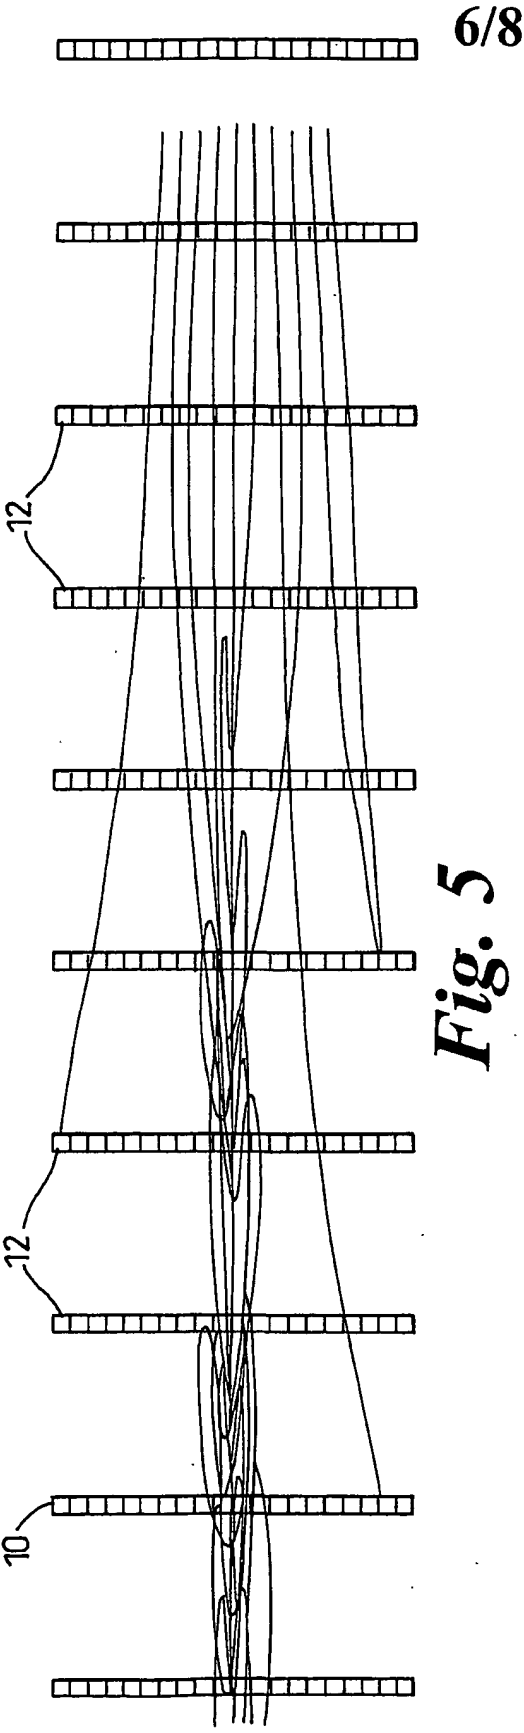


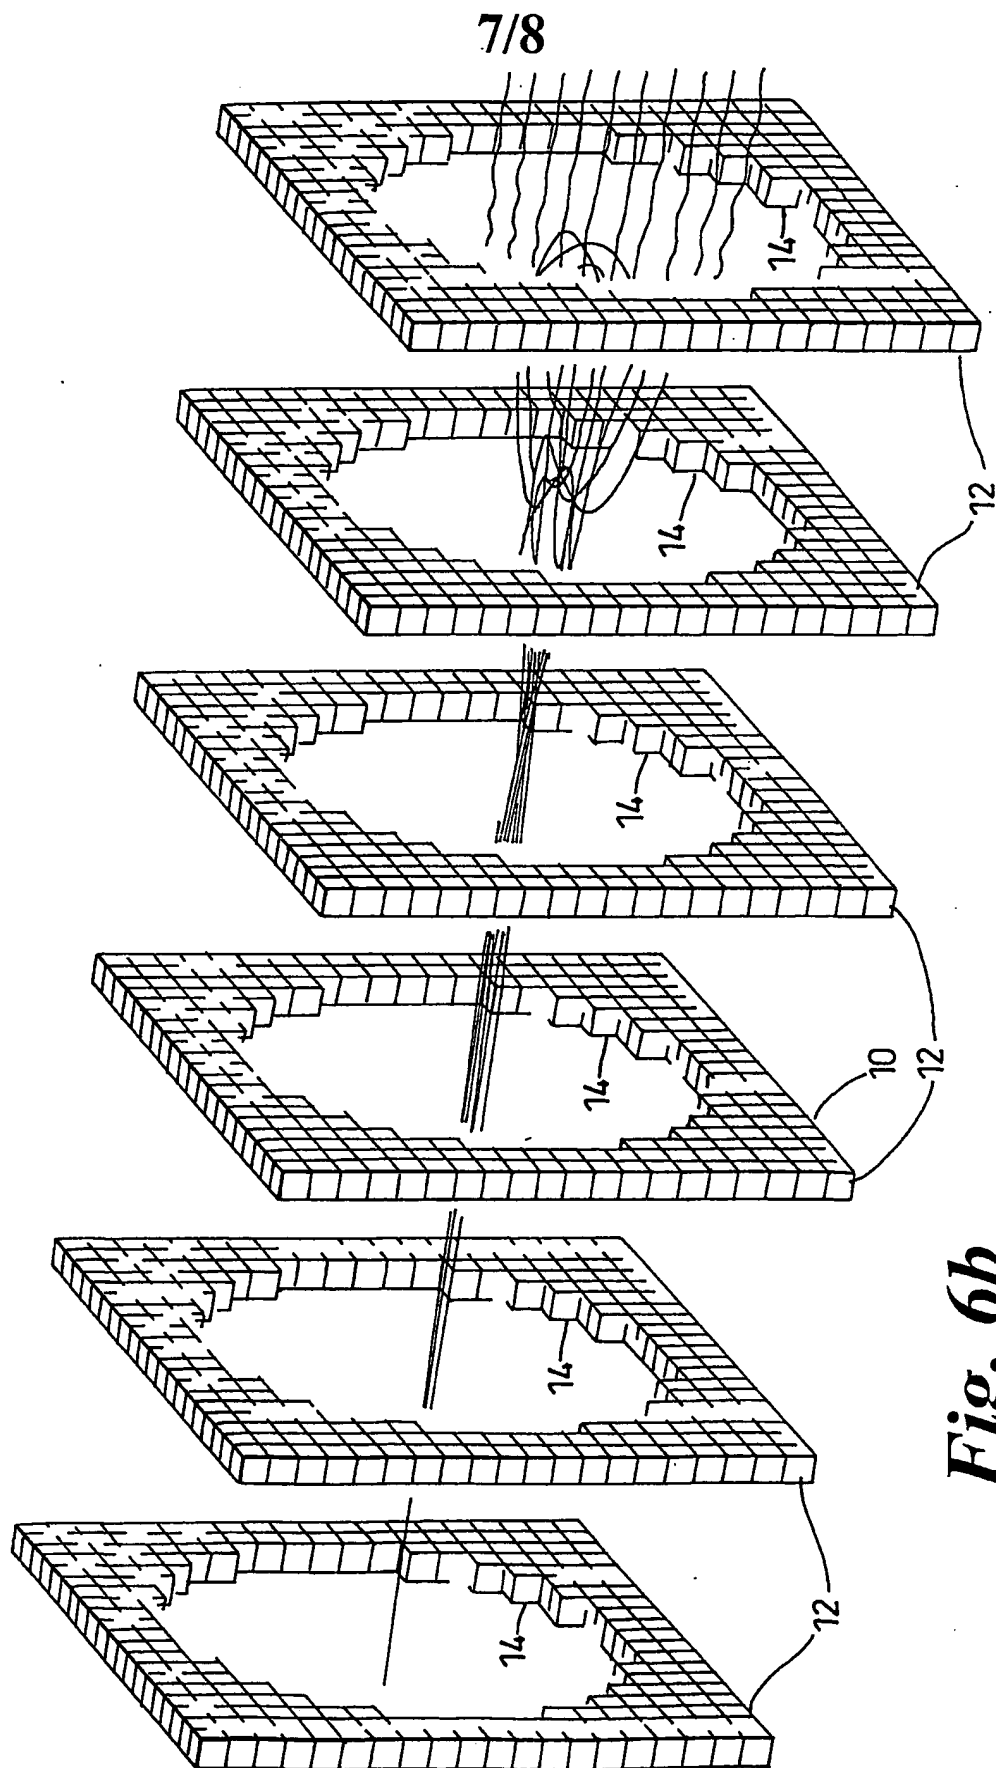

**Fig. 6b**



8/8

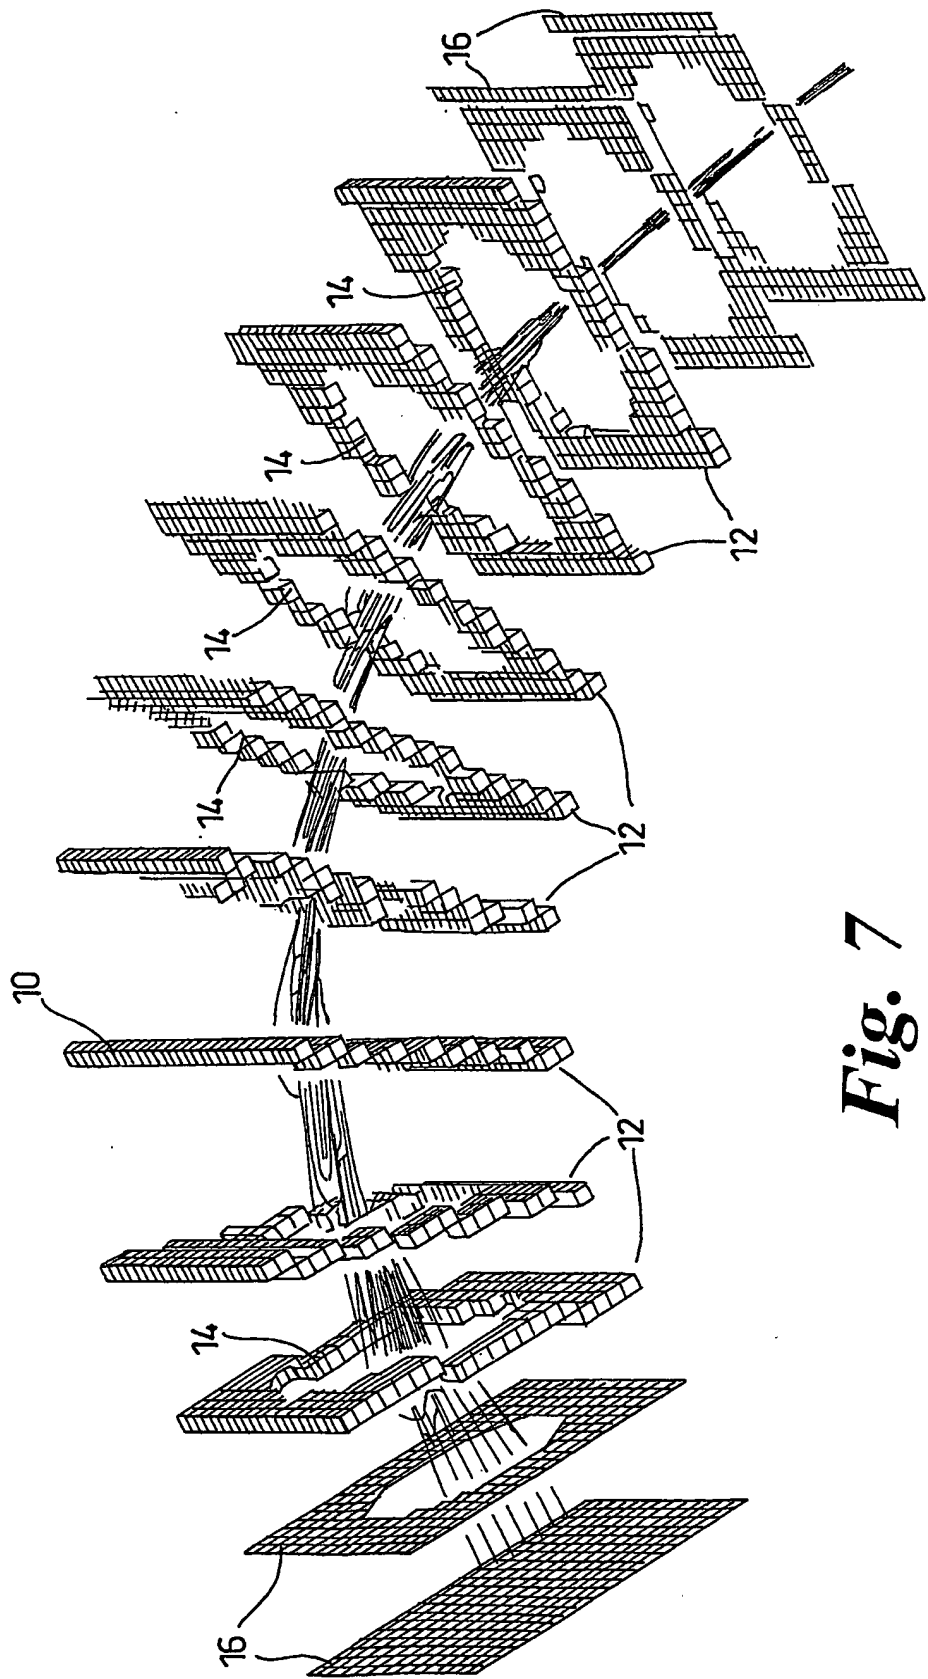

*Fig. 7*

## INTERNATIONAL SEARCH REPORT

PCT/GB 01/05174

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01J49/42

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 206 506 A (KIRCHNER NICHOLAS J) 27 April 1993 (1993-04-27)	1-15, 18-23, 25-30, 33-42
Y	column 9 -column 10 column 21 -column 22 column 29 -column 30	16,17
Y	US 2 798 956 A (LANE LLOYD H ET AL) 9 July 1957 (1957-07-09) column 3	16,17

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the International filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the International filing date but later than the priority date claimed

\*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the International search

31 January 2002

Date of mailing of the International search report

08/02/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Hulne, S

## INTERNATIONAL SEARCH REPORT

PCT/GB 01/05174

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5206506	A	27-04-1993	AU 643653 B2	18-11-1993
			AU 1469392 A	07-09-1992
			CA 2079910 A1	13-08-1992
			DE 69210496 D1	13-06-1996
			DE 69210496 T2	09-01-1997
			EP 0524311 A1	27-01-1993
			JP 2865865 B2	08-03-1999
			JP 5509437 T	22-12-1993
			WO 9214259 A1	20-08-1992
US 2798956	A	09-07-1957	DE 1061542 B	
			FR 1134531 A	12-04-1957
			GB 777005 A	12-06-1957